

## Flowmatic® Plastic Filter Housings

*Top quality and economically priced plastic filter housings in generic packaging.*




### Buttress thread design

Provides superior sealing and greater security.

### Heavy Duty Construction

Housings are made entirely of the highest quality FDA grade NSF listed polypropylene.

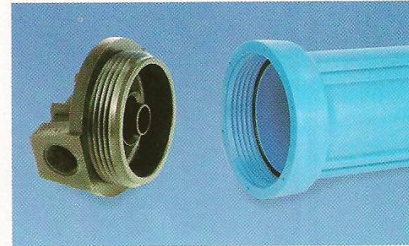

### Features & benefits

- Full product line for more types, models, pipe fittings and options than anyone in the business!
- Heavy duty construction, made using high quality FDA grade polypropylene.
- Superior chemical resistance from many aggressive chemicals.
- Buttress thread design for superior sealing and security.
- Thick side walls with heavy-duty ribs to provide greater strength.
- Temperature rated to 125°F (52°C).
- Pressure rated to 125 psi (8.75 bar).
- Cap, sump and top-seated o-rings compress to provide leak proof sealing.
- NSF Standard 42 certified (FH4200WW14, FH4200BB14, FH4200WW34).



ANSI / NSF 42  
CERTIFIED  
FH4200WW14  
FH4200WW34  
FH4200BB14

		Dimensions									
		Model	Size	A	B	C	D	E	F	G	H
		500 Series	5"	4.28"	1.57"	1.18"	0.16"	X	5.7"	7.0"	7.5"
		4000 Series	10"	4.72"	1.57"	1.18"	1.18"	X	10.5"	11.0"	11.8"
		4200 Series	10"	4.72"	1.57"	1.18"	1.18"	X	10.5"	11.0"	11.8"
		7000 Series	20"	4.72"	1.57"	1.18"	1.18"	X	20.47"	21.26"	22.8"
		4500 Series	10"	5.35"	2.22"	2.28"	0.23"	X	10.43"	11.49"	12.5"
		8000 Series	20"	5.35"	2.22"	2.28"	0.23"	X	20.47"	21.26"	22.8"
		Full-Flow (B-B)	10"	7.28"	3.03"	3.03"	0.275"	X	11.33"	11.57"	14.0"
		Full-Flow (B-B)	20"	7.28"	3.03"	3.03"	0.275"	X	21.25"	21.65"	24.0"

x = Depends on size of pipe fitting selected